

A4b - Hummingbird Automatic Dispenser



- ➡ Super High Accuracy: 1/2000Y
- ➡ 100% Recirculation
- ➡ Box Tinting

● Electrical Can Table Version

SANTINT • CHINA

Add: Feilong Road, Xingyang,
Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND

Add: Lageweg 35 - J, 2222 AG
Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND

Add: ul. Postepu 19. mag.5
02-676 Warszawa Polska
Email: gianni.capozzi@santint.com

SANTINT • U.S.A

Add: 2000 Bloomingdale Road,
Suite 220, Glendale Heights,
IL 60139, U.S.A
Email: frank@santint.com

SANTINT • AUSTRALIA

Add: 3 Technology Circuit
Hallam Victoria, Australia
Email: Info.AU@santint.com

A4b - Hummingbird FEATURES >>>



● Manual Can Table Version


1 Patented Double Pump Double Nozzle

1/2000Y Minimum Shot



2 100% Recirculation

Zero nozzle dryness/blockage;
purge-free;
maintenance-free;
colorant saving;
stable accuracy.




3 Box Tinting

Saving PC cost;
pre-installed software,
shorter installation time.



4 Calibration-free Piston Pump

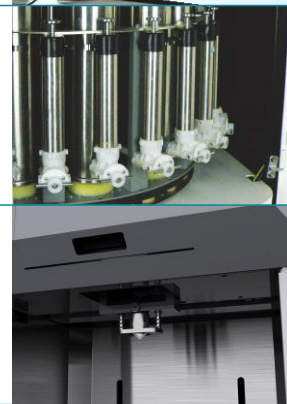

5 Optional Hole Puncher

(Electrical lifting tray)

<p> P1.1 Piston Pump Sequential Dispensing</p>	<ul style="list-style-type: none"> ■ Flow Rate 900ml/min ■ Efficiency 300ml/min
<ul style="list-style-type: none"> ■ Minimum Shot 1/2000Y(0.015ml) 	<ul style="list-style-type: none"> ■ Pump Capacity 100ml ■ Stirring Speed 20rpm
<ul style="list-style-type: none"> ■ Canister Size 1.35L / 1.8L / 2.3L / 6L POM 2.3L / 3.8L Stainless Steel (Optional) ■ NO. of Canisters Up to 32 ■ Optional Electrical Can Table /Automatic Puncher 	
<ul style="list-style-type: none"> ■ Max Can Size (D X H) Manual 360mmX460mm Electrical 390mmX440mm 	
<ul style="list-style-type: none"> ■ Machine Dimension (W X D X H) 870X1026X1290mm ■ Packing Dimension (W X D X H) 920X1170X1500mm Loading Quantity 12 Pieces/20"Container 	
<ul style="list-style-type: none"> ■ Net Weight Electrical 220Kg, Manual 210kg ■ Gross Weight Electrical 250Kg, Manual 240Kg 	<ul style="list-style-type: none"> ■ Power ≤ 150W ■ Power Supply 220V/110V 50Hz/60Hz

A4b - Hummingbird Technical Parameters

