SANTINT
WHERE INNOVATION MEETS PRECISION

Perfitall

Paint Mixing Machine

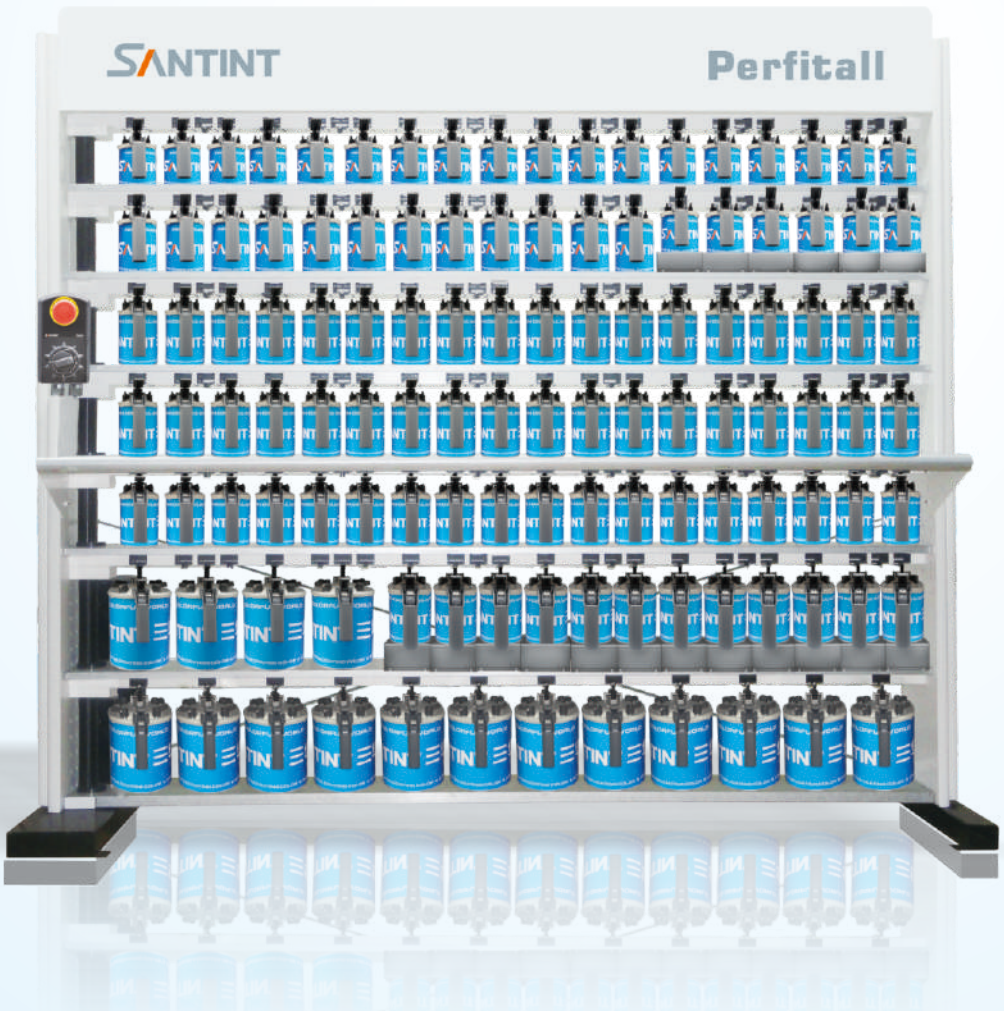

- High-end
- Flexible

SANTINT • CHINA
Add: Feilong Road, Xingyang, Zhengzhou, China
Email: info@santint.com

SANTINT • HOLLAND
Add: Lageweg 35 - J, 2222 AG Katwijk The Netherlands
Email: sales@santint-europe.com

SANTINT • POLAND
Add: 19 Postępu Street (warehouse no. 5)02-676 Warsaw, Poland
Email: albert@santintpoland.com

SANTINT • U.S.A
Add: 2000 Bloomingdale Road, Suite 205, Glendale Heights, IL 60139, U.S.A
Email: dino@santintusa.com

SANTINT• BRAZIL
Add: Rua Rosa Kasinski, 1109 (Galpão 30) - Capuava - Cep: 09380-128 - Mauá / Sp
Email: marcos@santint.com

SANTINT • INDIA
Add: Building No.E3 , 2/3 , Hari Hari Compound, Near Gajanan Petrol Pump, Mankoli Nana, Bhiwandi 421302 Thane India
Email: nick@santint.com

Perfitall FEATURES

SANTINT
WHERE INNOVATION MEETS PRECISION

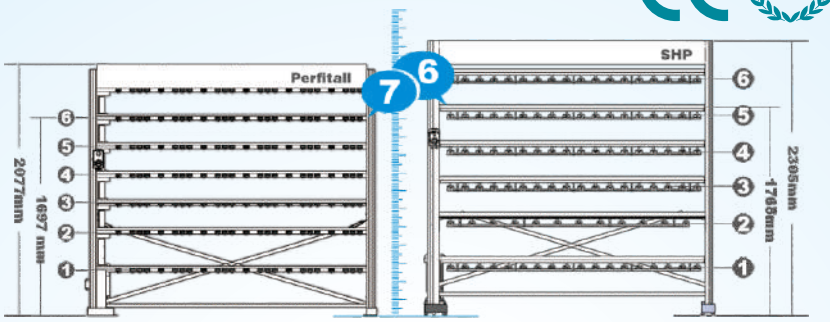

7<6! | **Lower height, more layers, larger capacity.**

Model	Configurations for Each Layer
PA4	4+0 | 3+1 | 2+3 | 1+4 | 0+6 | — | —
PA6	6+0 | 5+1 | 4+3 | 3+4 | 2+6 | 1+7 | 0+9
PA8	8+0 | 7+1 | 6+3 | 5+4 | 4+6 | 3+7 | 2+9
	1+10 | 0+12 | — | — | — | — | —
PA10	10+0 | 9+1 | 8+3 | 7+4 | 6+6 | 5+7 | 4+9
	3+10 | 2+12 | 1+13 | 0+15 | — | — | —
PA12	12+0 | 11+1 | 10+3 | 9+4 | 8+6 | 7+7 | 6+9
	5+10 | 4+12 | 3+13 | 2+15 | 1+16 | 0+18 | —

Notes: =2.5-5Ltinter package, =0.5-1Ltinter package。

1 Flexible
Flexible choice of layer height/width/can positions.

2 Easy to Install
One person, three steps, half an hour.



3 Overall Package
Convenient for storage and safer for transportation.

4 Easy to Change
Easy to be equipped with heating module.



5 Optional Hanging Shelf

- Mixing Time 0-15 Mins/Time
- Speed 72 rpm
- Power 400W/550W/750W（Optional）

Model	Size (WXDXH)	Pieces
PA4	1000×630×2077 mm	44/20" Container
PA6	1360×630×2077 mm	32/20" Container
PA8	1720×630×2077 mm	32/20" Container
PA10	2080×630×2077 mm	26/20" Container
PA12	2440×630×2077 mm	26/20" Container

- Options Explosion-proof Motor/Side Hanging Plate/Working Platen /Tinter Shelf/Back Storage Shelf

Perfitall Technical Parameters